

## Digital Shear Beam Load Cell



### FEATURES

- Capacities: 0.5, 1, 2, and 5t
- Digital output via RS-485 or RS-422 interface
- Stainless steel construction with water block cable-entry
- Hermetically sealed, IP66 and IP68
- Certified to OIML R-60, 6000d
- Internal diagnostics
- 240000 counts resolution
- Maximum transmission distance 1200m

### OPTIONAL FEATURE

- Multi-interval and multiple-range versions available

### DESCRIPTION

The SBC is a stainless steel, single ended, shear beam load cell with a digital output signal.

This digital output enables the user to communicate with each SBC independently of the others in the system, thus offering advantages in system setup, system control, corner correction, fault finding and load cell replacement.



The fully welded construction and water block cable-entry ensure successful use in harsh environments. Applications of the SBC include medium capacity platform scales, pallet scales, overhead track scales and process weighing applications.

This product meets the stringent Weights and Measures requirements throughout Europe.

### APPLICATIONS

- Platform scales
- Belt scales
- Overhead track scales
- Silo hopper weighing

### OUTLINE DIMENSIONS in mm

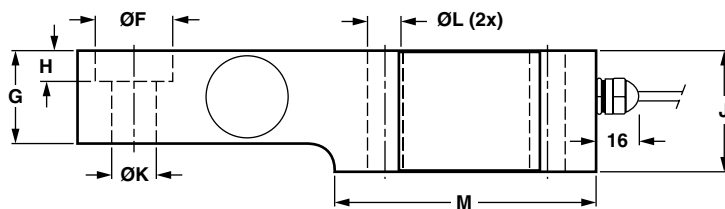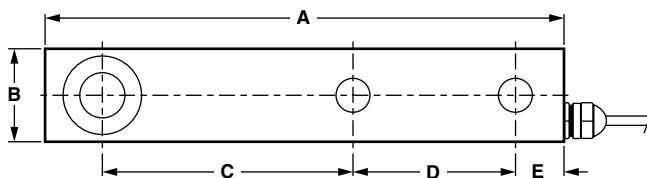

Cable specifications:

Cable length: 5 meters

Excitation + Green

Excitation - Black

Rx + Yellow

Rx - Blue

Tx - White

Tx + Red

Shield Transparent

Note: Dimensions are in millimeters

Capacity (t)	0.5 - 2	5	10
A	203.2	235.0	235.0
B	36.5	47.5	55.0
C	98.4	123.8	123.8
D	63.5	66.7	66.7
E	19.1	20.6	20.6
ØF	30.2 <sup>+0.2</sup> <sub>0</sub>	41.3 <sup>+0.2</sup> <sub>0</sub>	41.3 <sup>+0.2</sup> <sub>0</sub>
G	36.5	47.6	56.0
H	11.9	15.8	15.8
J	47.6	69.9	69.9
ØK	17.5 H11	25.5 H11	25.5 H11
ØL	14.0	22.0	25.0
M	101.6	111.2	111.2



**SPECIFICATIONS**

PARAMETER	VALUE				UNIT
Standard capacities ( $E_{max}$ )	0.5, 1, 2, 5				ton
Accuracy class according to OIML R-60	C1	C3	C5	C6	
Maximum no. of verification intervals (n)	1000	3000	5000	6000	
Minimum verification interval ( $V_{min}=E_{max}/Y$ )	$E_{max}/7000$	$E_{max}/15000$	$E_{max}/15000$	$E_{max}/15000$	
Minimum utilisation	14.3	30	33.3	40	%
Minimum verification interval, type MR		$E_{max}/25000$	$E_{max}/25000$	$E_{max}/25000$	
Rated output (=S)	240000				counts
Tolerance on rated output	200				±counts
Zero balance	200				±counts
Combined error	0.0300	0.0200	0.0140	0.0115	±% FSO
Non-repeatability	0.0200	0.0100	0.0080	0.0060	±% FSO
Minimum dead load output return	0.0500	0.0167	0.0100	0.0083	±% applied load
Creep error (30 minutes)	0.0490	0.0245	0.0147	0.0123	±% applied load
Temp. effect on min. dead load output	0.0100	0.0070	0.0045	0.0045	±% FSO/5°C
Temperature effect on sensitivity	0.0085	0.0050	0.0030	0.0025	±% applied load/5°C
Compensated temperature range	-10 to +40				°C
Operating temperature range	-40 to +80				°C
Storage temperature range	-40 to +90				°C
Maximum safe over load	150				% $E_{max}$
Ultimate over load	300				% $E_{max}$
Maximum safe side load	100				% $E_{max}$
Deflection at $E_{max}$	0.5 max				mm
Excitation voltage	12.5 to 18				Vdc
Maximum excitation voltage	15				V
Maximum current consumption	80				mA
Maximum current (internal short circuit)	150				mA
Insulation resistance	>5000				MΩ
Element material (DIN)	Stainless steel 1.4542				
Sealing (DIN 40.050 / EN60.529)	IP66 and IP68				
Signal update per second	25				
Baudrate	9600				Bits/s
Start bits	1				
Data bits	7				
Stop bits	1				
Parity	Odd				
Maximum transmission cable length	1200				m
Data transmission interface	RS485/422-full duplex				



## SPECIFICATIONS cont.

PARAMETER	VALUE			UNIT
Standard capacities ( $E_{max}$ )	0.5, 1, 2, 5			ton
Accuracy class according to OIML R-60	<b>C3MI10</b>	<b>C4MI10</b>	<b>C5MI10</b>	
Maximum no. of verification intervals (n)	3000	4000	5000	
Minimum verification interval ( $V_{min}=E_{max}/Y$ )	$E_{max}/15000$	$E_{max}/15000$	$E_{max}/25000$	
Minimum utilisation	20	26.7	20	%
Minimum dead load output return DR	0.0050	0.0050	0.0050	±% applied load
Temp. effect on min. dead load output	0.0045	0.0045	0.0032	±% FSO/5°C

## VISHAY TRANSDUCERS (VT) SALES OFFICES

**VT Americas**  
**City of Industry, CA**  
 PH: +1-626-858-8899  
 FAX: +1-626-332-3418  
 vt.us@vishaymg.com

**VT Netherlands**  
**Breda**  
 PH: +31-76-548-0700  
 FAX: +31-76-541-2854  
 vt.nl@vishaymg.com

**VMG UK**  
**Basingstoke**  
 PH: +44-125-646-2131  
 FAX: +44-125-647-1441  
 vt.uk@vishaymg.com

**VMG Israel**  
**Netanya**  
 PH: +972-9-863-8888  
 FAX: +972-9-863-8800  
 vt.il@vishaymg.com

**VMG Germany**  
**Heilbronn**  
 PH: +49-7131-3901-260  
 FAX: +49-7131-3901-2666  
 vt.de@vishaymg.com

**VT China**  
**Tianjin**  
 PH: +86-22-2835-3503  
 FAX: +86-22-2835-7261  
 vt.prc@vishaymg.com

**VMG France**  
**Chartres**  
 PH: +33-2-37-33-31-20  
 FAX: +33-2-37-33-31-29  
 vt.fr@vishaymg.com

**VT Taiwan\***  
**Taipei**  
 PH: +886-2-2696-0168  
 FAX: +886-2-2696-4965  
 vt.roc@vishaymg.com  
 \*Asia except China



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.