

Universal Load Cell



FEATURES

- Capacities: 50 to 10,000kg (50 to 20,000lbs)
- Stainless steel construction
- Suitable for compression and tension applications
- Trimmed output versions standard
- Sealing: IP67
- Certified to OIML R-60, 3000d, NTEP class III L, 10000 divisions

OPTIONAL FEATURE

- FM approved for use in potentially explosive atmosphere

DESCRIPTION

The 9363 is a multipurpose stainless steel S-type load cell which can be used in tension or compression.

This product is suitable for a wide range of hybrid scales, overhead track scales, belt scales and process weighing applications.

Reliable sealing is ensured by the proprietary TRANSEAL potting compound


and additional mechanical protection of the strain gage area.

This product meets the stringent Weights and Measures requirements throughout Europe and the USA.

APPLICATIONS

- Suspended hoppers
- Overhead track scales
- Force measurement

OUTLINE DIMENSIONS in millimeters

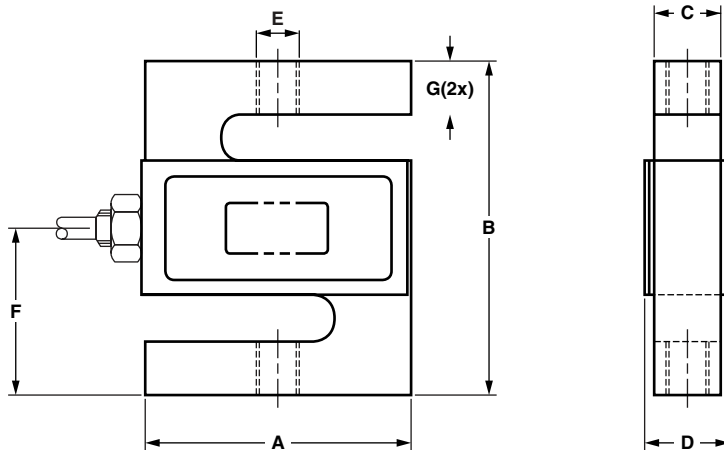

Cable specifications:

Cable length:	6m
Excitation +	Red
Excitation -	Black
Output +	Green
Output -	White
Shield	Transparent

Cable screen is not connected to the load cell body

Cap (kg)	50, 100	250, 500	1000	2500	5000	7500	10000
Cap (lbs)	100, 200, 300	500 - 1.5K	2K, 2.5K	3K*, 5K	10K	15000	20000
A	50.8	50.8	50.8	76.2	74.7	87.4	112.8
B	61.0	61.0	61.0	99.1	99.1	139.7	177.8
C	11.7	18.0	24.4	24.4	30.7	37.1	42.9
D max	16.5	22.9	29.2	29.2	35.6	41.4	47.8
E (kg)	M8 x 1.25-6H	M12 x 1.75-6H		M20 x 1.5-6H8		M24 x 2-6H	M30 x 2-6H
E (lbs)	1/4-28UNF-2B	1/2-20UNF-2B		3/4-16UNF-2B		1-14UNF-2B	1 1/4-12UNF-2B
F	30.5	30.5	30.5	49.5	49.3	69.9	88.9
G	8.9	8.9	8.9	14.0	15.7	22.4	31.8

*3Klb version has 1/2-20UNF-2B holes.



SPECIFICATIONS

PARAMETER	VALUE			UNIT
Standard capacities (E_{max})	50, 100, 250, 500, 1000, 2500, 5000, 7500, 10000*			kg
Standard capacities (E_{max})	50, 75, 100, 150, 200, 250, 300, 500, 750, 1K, 1.5K, 2K, 3K, 5K, 10K, 15K, 20K			lbs
Accuracy class per OIML R-60 / NTEP	NTEP III	Non-Approved	OIML C3	
Maximum no. of verification intervals (n)	10000	D3	3000	
Minimum verification intervals (V_{min})			$E_{max}/9000$	
Rated output (=FS)	3.0			mV/V
Rated output tolerance	0.0075			±mV/V
Zero balance	1.0			±% FSO
Combined error	0.0200	0.0300	0.0200	±% FSO
Non-repeatability	0.0100	0.0100	0.0100	±% FSO
Minimum dead load output return		0.0300	0.0165	±% applied load
Temp. effect on min. dead load output	(0.001)	(0.0015)	0.0140	±% FSO/5°C (°F)
Temperature effect on sensitivity	(0.0008)	(0.0008)	0.0055	±% applied load/5°C (°F)
Maximum safe over load	150			% E_{max}
Ultimate over load	250			% E_{max}
Excitation voltage	5 to 12			V
Maximum excitation voltage	15			V
Input resistance	390±15			Ω
Input resistance (Trimmed version)	390±15	430±60		Ω
Output resistance	350±3.5			Ω
Insulation resistance	≥5000			MΩ
Compensated temperature range	14 to +104°F	-10 to +40		°C
Operating temperature range	-65 to +200°F	-40 to +80		°C
Element material (DIN)	Stainless steel			
Sealing (DIN 40.050)	IP67			

* 10000kg is not OIML approved

FSO-Full Scale Output

VISHAY TRANSDUCERS (VT) SALES OFFICES

VT Americas
City of Industry, CA
PH: +1-626-858-8899
FAX: +1-626-332-3418
vt.us@vishaymg.com

VT Netherlands
Breda
PH: +31-76-548-0700
FAX: +31-76-541-2854
vt.nl@vishaymg.com

VMG UK
Basingstoke
PH: +44-125-646-2131
FAX: +44-125-647-1441
vt.uk@vishaymg.com

VMG Israel
Netanya
PH: +972-9-863-8888
FAX: +972-9-863-8800
vt.il@vishaymg.com

VMG Germany
Heilbronn
PH: +49-7131-3901-260
FAX: +49-7131-3901-2666
vt.de@vishaymg.com

VT China
Tianjin
PH: +86-22-2835-3503
FAX: +86-22-2835-7261
vt.prc@vishaymg.com

VMG France
Chartres
PH: +33-2-37-33-31-20
FAX: +33-2-37-33-31-29
vt.fr@vishaymg.com

VT Taiwan*
Taipei
PH: +886-2-2696-0168
FAX: +886-2-2696-4965
vt.roc@vishaymg.com
*Asia except China



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.