

S-Type Load Cell



FEATURES

- Capacities: 25 to 5000kg, 250 to 40Klb
- Alloy steel construction
- Stainless steel available
- Bi-direction(tension/compression)
- Rationalized output
- NTEP Class III 5000S, III L10000 approval from 250lb to 20Klb

OPTIONAL FEATURE

- FM approval available

DESCRIPTION


S Type load cell as the name indicated can be easily identified by S-shaped body. They can be loaded either in tension or compression, and used for single or multiple-cell application if the output is rationalized.

STC is made of alloy or stainless steel, sealed to IP67 providing excellent protection against moisture and humidity.

APPLICATIONS

- Electro-mechanical conversion scales
- Silo/hopper/tank weighing
- Crane scales
- Fork-lift scales
- Dosing/filling
- Universal material tester
- Tensile/pulling force measurement

OUTLINE DIMENSIONS

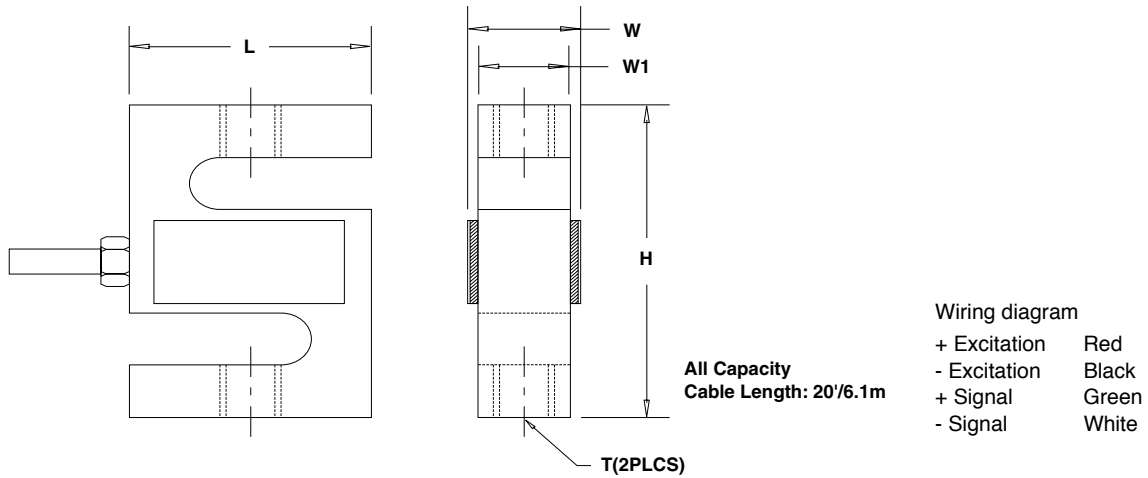

CAPACITY		L	W	W1	H	T
25/50/75kg	mm	50.8	26.7	12.7	63.5	M6 x 1.0
	(inch)	2.00	1.05	0.50	2.50	
100/150kg	mm	50.8	22.92	19.1	76.2	M10 x 1.5
	(inch)	2.00	0.9	0.75	3.00	
250/300lb	mm	50.8	26.7	12.7	76.2	3/8-24UNF
	(inch)	2.00	1.05	0.50	3.00	
250kg 500/750lb	mm	50.8	30.4	19.1	76.2	M12 x 1.75
	(inch)	2.00	1.2	0.75	3.00	1/2-20UNF
500/750kg	mm	50.8	25.4	19.1	76.2	M12 x 1.75
	(inch)	2.00	1.00	0.75	3.00	
1K/1.5Klb	mm	50.8	26.1	19.1	76.2	1/2-20UNF
	(inch)	2.00	1.03	0.75	3.00	
1000/1500kg 2K/2.5K/3Klb	mm	50.8	31.8	25.4	76.2	M12 x 1.75
	(inch)	2.00	1.25	1.00	3.00	1/2-20UNF
5K/7.5Klb	mm	76.2	31.8	25.4	107.9	3/4-16UNF
	(inch)	3.00	1.25	1.00	4.25	
2000/2500/5000kg	mm	76.2	38.1	31.8	100.4	M20 x 1.5
	(inch)	3.00	1.50	1.25	3.95	
10Klb	mm	88.9	31.8	25.4	120.7	3/4-16UNF
	(inch)	3.50	1.25	1.00	4.75	
15Klb	mm	101.6	38.1	31.8	139.7	1-14UNS
	(inch)	4	1.50	1.25	5.50	
20Klb	mm	127	55.7	50.8	177.8	11/4-12UNF
	(inch)	5	2.19	2	7.00	
40Klb	mm	152.4	69.9	63.5	254.0	11/2-12UNF
	(inch)	6.00	2.75	2.50	10.00	



SPECIFICATIONS

PARAMETER	VALUE		UNIT
	NTEP III & IIL	Non-Approved	
NTEP/OIML Accuracy class			
Maximum no. of intervals (n)	III 5000 single* IIL 10000 single*	2000	
$Y = E_{max}/V_{min}$	10000	5000	Maximum available
Standard capacities (E_{max})	25, 50, 75, 100, 250, 500, 750, 1000, 1500, 2000, 2500, 5000		kg
Standard capacities (E_{max})	250, 300, 500, 750, 1K, 1.5K, 2K, 2.5K, 3K, 5K, 7.5K, 10K, 15K, 20K, 40K		lbs
Rated output-R.O.	3.0		mV/V
Rated output tolerance	0.25		±% of rated output
Zero balance	1		±% of rated output
Non linearity	0.020	0.020 (SS: 0.05)	±% of rated output
Hysteresis	0.020	0.020 (SS: 0.05)	±% of rated output
Non-repeatability	0.020		±% of rated output
Creep error (20 minutes)	0.030		±% of rated output
Zero return (20 minutes)	0.030		±% of rated output
Temperature effect on min. dead load output	0.0015	0.0026	±% of rated output/°C
Temperature effect on sensitivity	0.0010	0.0015	±% of applied load/°C
Compensated temperature range	-10 to +40		°C
Operating temperature range	-20 to +60		°C
Safe overload	150		% of R.C.
Ultimate overload	300		% of R.C.
Excitation, recommended	10		Vdc or Vac rms
Excitation, maximum	15		Vdc or Vac rms
Input impedance	385±5		Ohms
Output impedance	350±3		Ohms
Insulation resistance	>5000		Mega-Ohms
Construction	Nickel plated alloy steel**		
Environmental protection	IP67		

* Capacities 250-20Klbs

** Stainless steel available

All specifications listed subject to change without notice.

FM Approval

Intrinsically Safe: Class I, II, III; Div. 1 Groups A-G

Non-Incendive: Class I; Div. 2 Groups A-D

VISHAY TRANSDUCERS (VT) SALES OFFICES

VT Americas
City of Industry, CA
PH: +1-626-858-8899
FAX: +1-626-332-3418
vt.us@vishaymg.com

VT Netherlands
Breda
PH: +31-76-548-0700
FAX: +31-76-541-2854
vt.nl@vishaymg.com

VMG UK
Basingstoke
PH: +44-125-646-2131
FAX: +44-125-647-1441
vt.uk@vishaymg.com

VMG Israel
Netanya
PH: +972-9-863-8888
FAX: +972-9-863-8800
vt.il@vishaymg.com

VMG Germany
Heilbronn
PH: +49-7131-3901-260
FAX: +49-7131-3901-2666
vt.de@vishaymg.com

VT China
Tianjin
PH: +86-22-2835-3503
FAX: +86-22-2835-7261
vt.prc@vishaymg.com

VMG France
Chartres
PH: +33-2-37-33-31-20
FAX: +33-2-37-33-31-29
vt.fr@vishaymg.com

VT Taiwan*
Taipei
PH: +886-2-2696-0168
FAX: +886-2-2696-4965
vt.roc@vishaymg.com
*Asia except China



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.