


Cylindrical Double Ended Shear Beam

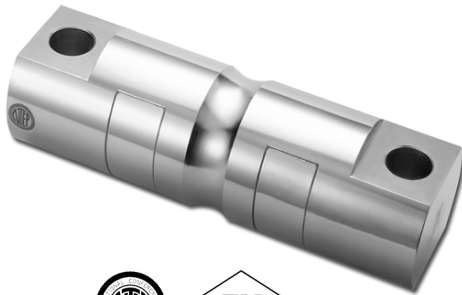

FEATURES

- Capacities 5K-150Klb
- Center-loaded double-ended shear beam design
- Free of horizontal movement
- Insensitive to side load
- Electroless nickel plated alloy tool steel
- NTEP Class III L 10000 approval from 20Klb to 200Klb

OPTIONAL FEATURE

- FM approval available

DESCRIPTION

The double-ended mounting provides good restraint for possible movement of tanks and, in many cases, eliminates the need for check rods. The Shear Beam design gives excellent performance for high capacity loading


The cylindrical construction provides easy installation with simple loading features.

CSB is constructed of alloy steel and is fully potted with special chemical compounds to IP67 providing excellent protection against moisture and humidity.

APPLICATIONS

- Truck / rail scales
- Silo / hopper / tank weighing
- Fork-lift scales

OUTLINE DIMENSIONS

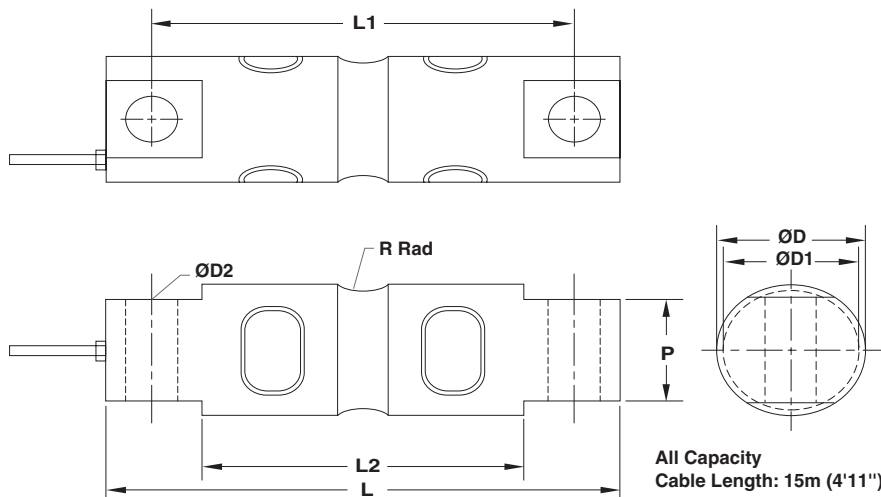

Wiring diagram

- + Excitation Red
- Excitation Black
- + Signal Green
- Signal White

CAPACITY		L	L1	L2	D	D1	D2	P	R
5K/ 10Klb	mm	206.3	174.8	133.1	43.2	37.7	16.8	28.5	12.7
	(inch)	8.12	6.88	5.24	1.70	1.48	0.66	1.12	0.50
20Klb	mm	206.3	174.8	133.1	49.5	37.9	16.8	28.5	12.7
	(inch)	8.12	6.88	5.24	1.95	1.49	0.66	1.12	0.50
30K/ 40K/ 50K/ 60Klb	mm	260.4	215.9	164.8	76.2	69.4	26.9	60.2	25.4
	(inch)	10.25	8.50	6.49	3.20	2.73	1.06	2.37	1.00
100Klb	mm	285.8	241.3	190.2	88.9	82.3	26.9	63.5	25.4
	(inch)	11.25	9.50	7.49	3.5	3.24	1.06	2.50	1.00
150Klb	mm	285.8	241.3	190.2	99.1	92.5	26.9	71.1	38.1
	(inch)	11.25	9.50	7.49	3.90	3.64	1.06	2.80	1.50



SPECIFICATIONS

PARAMETER	VALUE		UNIT
	NTEP III L	Non-Approved	
NTEP/OIML Accuracy class			
Maximum no. of intervals (n)	10000 multiple*		
$Y = E_{max}/V_{min}$	14000	5000	Maximum available
Standard capacities (E_{max})	5K, 10K, 20K, 30K, 40K, 50K, 60K, 100K, 150K		lbs
Rated output-R.O.	3.0		mV/V
Rated output tolerance	0.25		±% of rated output
Zero balance	1		±% of rated output
Non linearity	0.025		±% of rated output
Hysteresis	0.025		±% of rated output
Non-repeatability	0.02		±% of rated output
Creep error (20 minutes)	0.030		±% of rated output
Zero return (20 minutes)	0.030		±% of rated output
Temperature effect on min. dead load output	0.0010	0.0026	±% of rated output/°C
Temperature effect on sensitivity	0.0010	0.0015	±% of applied load/°C
Compensated temperature range	-10 to +40		°C
Operating temperature range	-20 to +60		°C
Safe overload	150		% of R.C.
Ultimate overload	300		% of R.C.
Excitation, recommended	10		Vdc or Vac rms
Excitation, maximum	15		Vdc or Vac rms
Input impedance	770±10		Ohms
Output impedance	700±5		Ohms
Insulation resistance	>5000		Mega-Ohms
Construction	Nickel plated alloy steel		
Environmental protection	IP67		

* Capacities 20K-150Klb only

All specifications listed subject to change without notice.

FM Approval

Intrinsically Safe: Class I, II, III; Div. 1 Groups A-G

Non-Incendive: Class I; Div. 2 Groups A-D

VISHAY TRANSDUCERS (VT) SALES OFFICES

VT Americas
 City of Industry, CA
 PH: +1-626-858-8899
 FAX: +1-626-332-3418
 vt.us@vishaymg.com

VT Netherlands
 Breda
 PH: +31-76-548-0700
 FAX: +31-76-541-2854
 vt.nl@vishaymg.com

VMG UK
 Basingstoke
 PH: +44-125-646-2131
 FAX: +44-125-647-1441
 vt.uk@vishaymg.com

VMG Israel
 Netanya
 PH: +972-9-863-8888
 FAX: +972-9-863-8800
 vt.il@vishaymg.com

VMG Germany
 Heilbronn
 PH: +49-7131-3901-260
 FAX: +49-7131-3901-2666
 vt.de@vishaymg.com

VT China
 Tianjin
 PH: +86-22-2835-3503
 FAX: +86-22-2835-7261
 vt.prc@vishaymg.com

VMG France
 Chartres
 PH: +33-2-37-33-31-20
 FAX: +33-2-37-33-31-29
 vt.fr@vishaymg.com

VT Taiwan*
 Taipei
 PH: +886-2-2696-0168
 FAX: +886-2-2696-4965
 vt.roc@vishaymg.com
 *Asia except China



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.